

Multilayer Chip Inductor for Choke– MCL-N Series

Operating Temp. : -40°C~+85°C



FEATURES

- Monolithic structure for high reliability
- Excellent solderability and high heat resistance
- No cross coupling due to magnetic shield
- High DC bias current due to developed material
- Low AC resistance, low power loss.


APPLICATIONS

- NFC output filtering and matching circuit, Power line, etc.

PRODUCT IDENTIFICATION

| <u>MCL</u> ① | <u>1608</u> ② | <u>N</u> ③ | <u>R16</u> ④ | <u>J</u> ⑤ | <u>T</u> ⑥ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|-------------------------|----------------------|------------------------|----------------------|--|--------------------------------|--|-------------|---------|-------------|---------|--|--------------|--|---|-----|--|--------------------|--|---------|---------------|-----|--------|------------------|--|--|----------------------|--|---|-----|---|------|---|------|---|---------|--|---|-------------|
| ① | ② | ③ | ④ | ⑤ | ⑥ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <tr><th colspan="2">Type</th></tr> <tr><td>MCL</td><td>Chip Power Inductor</td></tr> </table> | Type | | MCL | Chip Power Inductor | <table border="1"> <tr><th colspan="2">External Dimensions (L×W) (mm)</th></tr> <tr><td>1005 [0402]</td><td>1.0×0.5</td></tr> <tr><td>1608 [0603]</td><td>1.6×0.8</td></tr> </table> | External Dimensions (L×W) (mm) | | 1005 [0402] | 1.0×0.5 | 1608 [0603] | 1.6×0.8 | <table border="1"> <tr><th colspan="2">Feature Type</th></tr> <tr><td>N</td><td>NFC</td></tr> </table> | Feature Type | | N | NFC | <table border="1"> <tr><th colspan="2">Nominal Inductance</th></tr> <tr><td>Example</td><td>Nominal Value</td></tr> <tr><td>R16</td><td>0.16μH</td></tr> <tr><td colspan="2">※R=Decimal Point</td></tr> </table> | Nominal Inductance | | Example | Nominal Value | R16 | 0.16μH | ※R=Decimal Point | | <table border="1"> <tr><th colspan="2">Inductance Tolerance</th></tr> <tr><td>J</td><td>±5%</td></tr> <tr><td>K</td><td>±10%</td></tr> <tr><td>M</td><td>±20%</td></tr> </table> | Inductance Tolerance | | J | ±5% | K | ±10% | M | ±20% | <table border="1"> <tr><th colspan="2">Packing</th></tr> <tr><td>T</td><td>Tape & Reel</td></tr> </table> | Packing | | T | Tape & Reel |
| Type | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MCL | Chip Power Inductor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| External Dimensions (L×W) (mm) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1005 [0402] | 1.0×0.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1608 [0603] | 1.6×0.8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Feature Type | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| N | NFC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Nominal Inductance | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Example | Nominal Value | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| R16 | 0.16μH | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ※R=Decimal Point | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Inductance Tolerance | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| J | ±5% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| K | ±10% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| M | ±20% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Packing | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| T | Tape & Reel | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

SHAPE AND DIMENSIONS

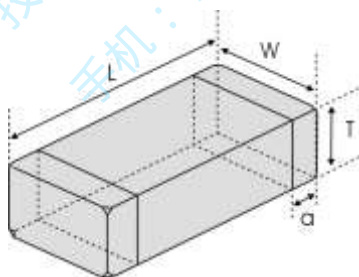

Unit: mm [inch]

| Type | L | W | T | a |
|--------------------|----------------------------|---------------------------|---------------------------|---------------------------|
| MCL1005N [0402] | 1.0±0.15 [0.039±0.006] | 0.5±0.15 [0.020±0.006] | 0.5±0.15 [0.020±0.006] | 0.25±0.1 [0.010±0.004] |
| MCL1608N [0603] | 1.60±0.15 [0.063±0.006] | 0.8±0.15 [0.031±0.006] | 0.8±0.15 [0.031±0.006] | 0.3±0.2 [0.012±0.008] |

SPECIFICATIONS

MCL1005N TYPE

| Part Number | Inductance | L Test Freq. | DC Resistance Max. | Min. Self-resonant Frequency | Saturation Current Typ. | Heat Rating Current Max. |
|---------------|------------|--------------|--------------------|------------------------------|-------------------------|--------------------------|
| Units | nH | MHz | Ω | MHz | mA | mA |
| Symbol | L | Freq. | DCR | S.R.F | Isat | Irms |
| MCL1005N77N□T | 77 | 25 | 0.27 | 200 | 550 | 550 |
| MCL1005N96N□T | 96 | 25 | 0.35 | 200 | 500 | 500 |
| MCL1005NR10□T | 100 | 25 | 0.35 | 200 | 500 | 500 |
| MCL1005NR11□T | 110 | 25 | 0.39 | 200 | 450 | 450 |
| MCL1005NR12□T | 120 | 25 | 0.39 | 200 | 450 | 450 |
| MCL1005NR13□T | 130 | 25 | 0.39 | 200 | 450 | 450 |
| MCL1005NR14□T | 140 | 25 | 0.45 | 200 | 450 | 450 |
| MCL1005NR15□T | 150 | 25 | 0.45 | 200 | 450 | 450 |
| MCL1005NR16□T | 160 | 25 | 0.52 | 200 | 550 | 400 |
| MCL1005NR18□T | 180 | 25 | 0.58 | 200 | 370 | 400 |
| MCL1005NR20□T | 200 | 25 | 0.58 | 200 | 370 | 400 |
| MCL1005NR22□T | 220 | 25 | 0.58 | 180 | 370 | 400 |
| MCL1005NR27□T | 270 | 25 | 0.65 | 180 | 350 | 350 |
| MCL1005NR33□T | 330 | 25 | 0.65 | 120 | 300 | 350 |
| MCL1005NR39□T | 390 | 25 | 0.97 | 120 | 300 | 300 |
| MCL1005NR47□T | 470 | 25 | 0.97 | 120 | 250 | 300 |
| MCL1005NR56□T | 560 | 25 | 1.40 | 120 | 250 | 250 |

MCL1608N TYPE

| Part Number | Inductance | L Test Freq. | DC ResistanceMax. | Min. Self-resonant Frequency | Saturation Current Typ. | Heat Rating Current Max. |
|---------------|------------|--------------|-------------------|------------------------------|-------------------------|--------------------------|
| Units | nH | MHz | Ω | MHz | mA | mA |
| Symbol | L | Freq. | DCR | S.R.F | Isat | Irms |
| MCL1608N77N□T | 77 | 25 | 0.11 | 200 | 1100 | 1100 |
| MCL1608N85N□T | 85 | 25 | 0.11 | 200 | 1100 | 1100 |
| MCL1608NR10□T | 100 | 25 | 0.12 | 200 | 1000 | 1000 |
| MCL1608NR12□T | 120 | 25 | 0.14 | 200 | 1000 | 800 |
| MCL1608NR16□T | 160 | 25 | 0.156 | 200 | 1100 | 700 |
| MCL1608NR20□T | 200 | 25 | 0.22 | 200 | 700 | 650 |
| MCL1608NR21□T | 210 | 25 | 0.26 | 200 | 700 | 600 |
| MCL1608NR22□T | 220 | 25 | 0.26 | 200 | 700 | 600 |
| MCL1608NR27□T | 270 | 25 | 0.286 | 200 | 650 | 550 |
| MCL1608NR33□T | 330 | 25 | 0.312 | 180 | 650 | 500 |
| MCL1608NR39□T | 390 | 25 | 0.36 | 180 | 600 | 450 |
| MCL1608NR47□T | 470 | 25 | 0.494 | 120 | 600 | 400 |
| MCL1608NR56□T | 560 | 25 | 0.52 | 120 | 550 | 400 |
| MCL1608NR65□T | 650 | 25 | 0.65 | 100 | 450 | 350 |
| MCL1608NR82□T | 820 | 25 | 0.75 | 80 | 400 | 300 |



※Isat: DC current at which the inductance drops approximate 10% from its value without current;

※Irms : DC current that causes the temperature rise ($\Delta T = 25^{\circ}\text{C}$) from 20°C ambient.



※□: Please specify the inductance tolerance code (J= $\pm 5\%$,K= $\pm 10\%$,M= $\pm 20\%$).

TYPICAL ELECTRICAL CHARACTERISTICS

Inductance vs. Frequency Characteristics

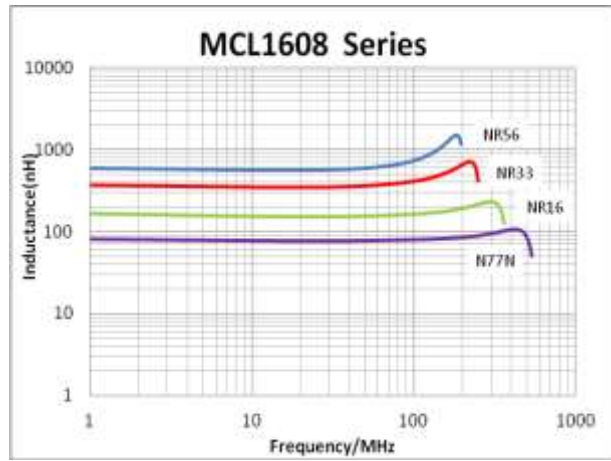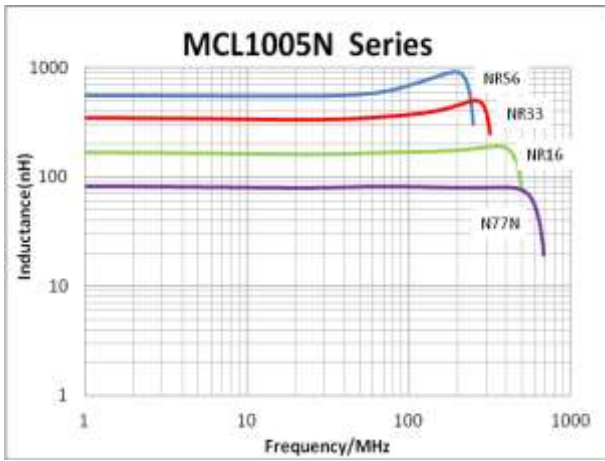

Impedance vs. Frequency Characteristics

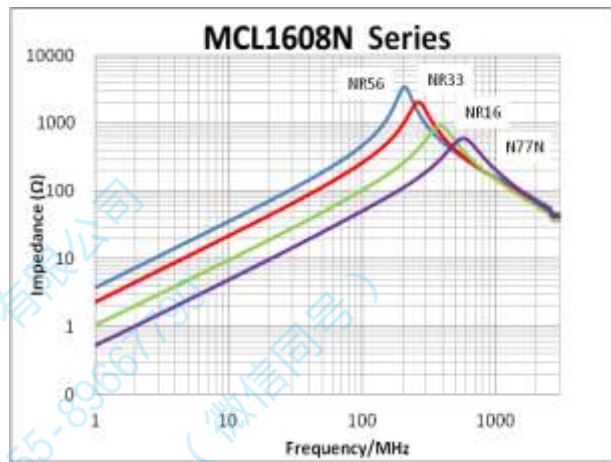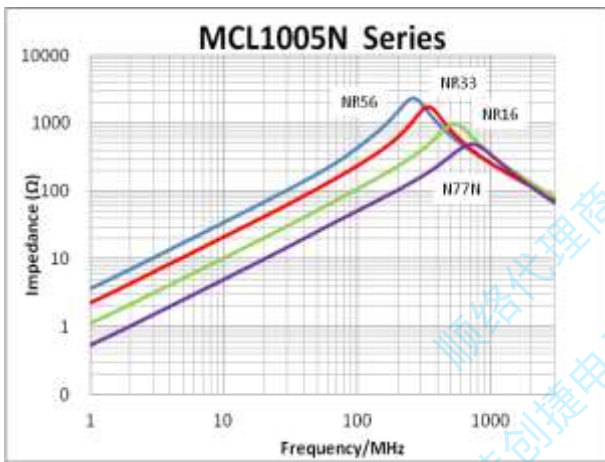

Inductance vs. DC Current Characteristics

